Replacement Parts List

NOTE: If requested color is not available, similar color will be substituted. Pricing may vary per model.

Part	Cost	Qty	Total Cost
Crotch Strap/Buckle	$6.99	X _____	= $ ____
Full Wrap Seat Pad (includes infant insert and Canopy)	$34.50	X _____	= $ ____
Harness Retainer	$1.50	X _____	= $ ____
Locking Clip	$2.50	X _____	= $ ____
Latch Kit	$24.99	X _____	= $ ____
Base	$59.95	X _____	= $ ____
Instructions	$0.00	X _____	= $ ____

Merchandise Total: $ ____

Shipping and Handling: $ ____

Up to $25.00 ..... $5.95	$150.01 to $200.00 . $11.95
$25.01 to $50.00 .. $6.95	$200.01 and up $13.95
$50.01 to $75.00 .. $8.95	Outside Continental USA
$75.01 to $100.00 . $9.95	$10.00
$100.01 to $150.00 . $10.95	

Sales Tax $ ____

(Indiana, California, Arkansas, and Massachusetts residents add applicable sales tax.)

Grand Total $ ____

No shipping and handling on instructions for quantities under 6. Add $.50 for each instruction over 6, then add applicable shipping and handling.

Fill Out For Credit Card

❑ Visa ❑ Mastercard

Card Exp. Date: _____

Cardholder's Name: _____

Card Number: _____

Signature: _____

Eng 4358-4273E

Mico™ Infant Seat Instruction Manual

www.maxi-cosi.com

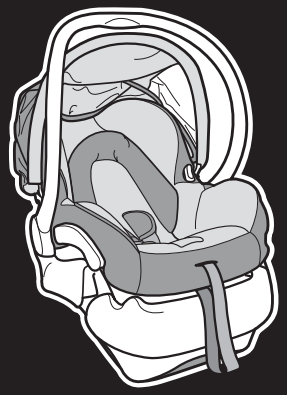

This child restraint is designed for use by children whose:

Weight: 5-22 pounds (2.3-10 kg)

Height: 19-29 inches (48-74 cm)

Read all instructions BEFORE USING this child restraint.

KEEP INSTRUCTIONS FOR FUTURE USE.

⚠IMPORTANT!

Failure to follow the warnings on the labels and in the instruction manual can result in the death or serious injury of your child.

Para recibir las instrucciones en español, llame al 1-800-951-4113 o solicitarse por escrito al dirección por arriba.

4358-4273E US Mico 11/17/09 11:10 AM Page 3

Before You Begin...

Thank you for choosing this car seat, referred to throughout this manual as a child restraint. The Maxi-Cosi Brand is part of the Dorel Juvenile Group (DJG) family that is committed to creating a child restraint with the most comfort and convenience available today.

Remember, parents are a child's first teachers and examples. If you always buckle your seat belt, your child will think it is the natural thing to do. Make it a firm rule that the vehicle does not go until everyone is buckled up. Make no exceptions.

No one can predict if use of a child restraint will prevent injury or death in a particular crash. However, combined with careful driving, proper use of a child restraint can lower a child's risk of injury or death in most crashes.

Your child's safety is worth the time it will take to read and follow these instructions. After reading, if you still have questions or have any problems with this child restraint, please contact our Consumer Relations Department at:

Dorel Juvenile Group, Inc.

Website:	www.maxi-cosi.com
Fax:	1-800-207-8182
Mailing Address:	Dorel Juvenile Group, Inc. P.O. Box 2609 Columbus, IN 47202-2609
Telephone:	1-800-951-4113 7 A.M. to 6 P.M. EST M-TH 7 A.M. to 4:30 P.M. EST FRI

On the back of the shell there is an expiration date for use of this child restraint. Do not use this seat after the expiration date.

4358-4273E US Mico 11/17/09 11:10 AM Page 5

Table of Contents

Before You Begin 1-2
Table of Contents 3-4
General and Warm Weather Use 5
Aircraft Installation 5
Registration and Recall 6
Warnings 7-10
Understanding Your Vehicle 11-12
Child Restraint Parts 13-14
Removing and Attaching
Carrier to the Base 15-16
Canopy Installation and Use 17
Accessories (on select models) 18
Choosing Restraint and Position 19
Preparing Child Restraint 20-25
Securing Your Child in the Child Restraint 26-28
Removing Your Child from the Child Restraint 29
Carrier Use 30-31
Choosing LATCH or Vehicle Belts 32-33
Knowing Your Vehicle Belts 34-36
Locking Clip 37-38
Rear-Facing Use 39
Rear-Facing Installation
Vehicle Belt Using the Base 40-44
Vehicle Belt Without Base 45-47
LATCH Belt Using Base 48-53
Removing Seat Pad for Cleaning 54-57
Troubleshooting 58-59
Warranty 60-61
Replacement Parts Order Form 65-67

4358-4273E US Mico 11/17/09 11:10 AM Page 7

General and Warm Weather Use

To help protect your vehicle seat's upholstery from damage, use a seat protector or a towel underneath and behind child restraint.

To avoid your child being seriously burned, take the following precautions:

1. Park in the shade or where sun does not directly hit the child restraint.

2. Cover the child restraint with a sheet or blanket when not in use.

3. Check for hot seat and buckles before placing child in child restraint.

Aircraft Installation

This child restraint is certified for aircraft use. Use on forward-facing aircraft seats only and in a position where the lap belt can be tightened securely. This child restraint is installed in an aircraft seat the same way it is installed in a vehicle.

Use the child restraint only with F.A.A. certified equipment. Contact the airline prior to taking a child restraint on board in order to comply with their specific regulations.

Registration and Recall Information

Child restraints could be recalled for safety reasons. You must register this restraint to be reached in a recall. Send your name, address and the restraint's model number and manufacturing date to:

Dorel Juvenile Group, Inc.
P.O. Box 2609
Columbus, IN 47202-2609
Attn: Consumer Relations or
visit www.maxi-cosi.com or call 1-800-951-4113.

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153), or go to http://www.NHTSA.gov.

⚠ WARNING

Failure to follow these warnings can result in the serious injury or death of your child. To help you recognize those instructions which are most critical to your child's safety, we use this symbol ⚠:

⚠ According to accident statistics, children are safer when properly restrained in the rear seating positions than in the front seating positions.

⚠ Never place a child in front of an airbag in the rear-facing position. Death or serious injury can occur.

⚠ This child restraint must always face the rear of the vehicle.

⚠ This restraint must only be used when the child weighs between 5-22 lbs. (2.3-10 kg).

⚠ Never place a child less than one year old forward facing.

⚠ WARNING

⚠ Check vehicle instructions for more information about air bag/child restraint use.

⚠ For vehicles with an air bag, but without a back seat, refer to your vehicle owner's manual.

⚠ Make sure the harness height is correct for your child's size.

⚠ The harness must be snug.

⚠ The vehicle or LATCH belt must stay tight at the belt path. If it's not, your child could be injured or killed.

⚠ Never take your child out of the child restraint or try to tend to your child's needs while the vehicle is moving. Never leave child unattended.

⚠ Do not use a child restraint with damaged or missing parts.

⚠ Do not use cut, frayed or damaged harness straps.

⚠ WARNING

⚠ Do not substitute parts or try to modify the child restraint in any way.

⚠ Do not use a child restraint that has been in a crash. You must get a new child restraint.

⚠ Use the child restraint only on vehicle seats that face forward. Do not use on seats that face the sides or rear of the vehicle.

⚠ Check the vehicle or LATCH belt before each use. Use only if the belt can be tightened properly and securely.

⚠ This child restraint should be securely belted in the vehicle even when not in use. In a crash or sudden stop, an unsecured child restraint could injure other occupants.

⚠ Never allow any child to play with this child restraint; it is not a toy.

⚠ Do not lubricate buckles and fasteners.

⚠ WARNING

⚠ Do not use this child restraint when the top of your child's head comes within one inch of the top of the child restraint's head area.

⚠ Dorel Juvenile Group does not recommend the use of any child restraint accessories except those provided by DJG.

⚠ Do not remove any of the warning labels or other labels on the child restraint.

⚠ Placing your child in a hot child restraint may result in burns.

⚠ Do not use this child restraint without the seat pad.

⚠ Read instructions for other warnings.

4358-4273E US Mico 11/17/09 11:10 AM Page 13

Understanding Your Vehicle

Your vehicle's features may be considerably different than those pictured here. Consult your vehicle owner's manual to help identify your vehicle's specific features.

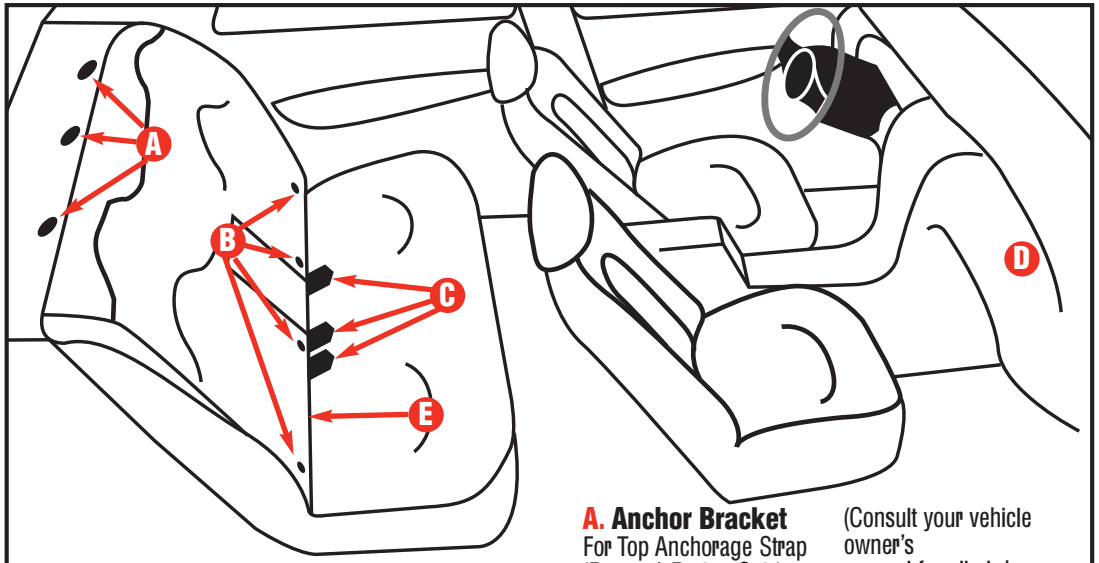

A. Anchor Bracket
For Top Anchorage Strap (Forward-Facing Only)

B. LATCH Anchors
(In seat bight)

C. Seat Buckles

D. Air Bag
(Consult your vehicle owner's manual for all air bag locations)

E. Seat Bight
(Where seat cushions meet)

4358-4273E US Mico 11/17/09 11:10 AM Page 15

Child Restraint Parts

Front

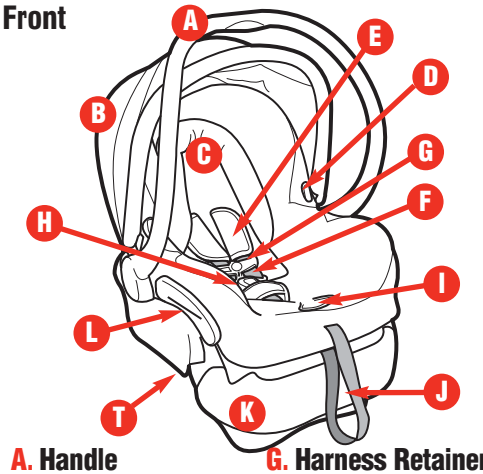

- **A. Handle**
- **B. Canopy**
- **C. Infant Head Insert** (on select models)
- **D. Stroller Release Buttons**
- **E. Harness Covers** (on select models)
- **F. Harness Straps**
- **G. Harness Retainer**
- **H. Buckle**
- **I. Harness Release Lever** (under flap)
- **J. Harness Adjustment Strap**
- **K. Removable Base**

Back

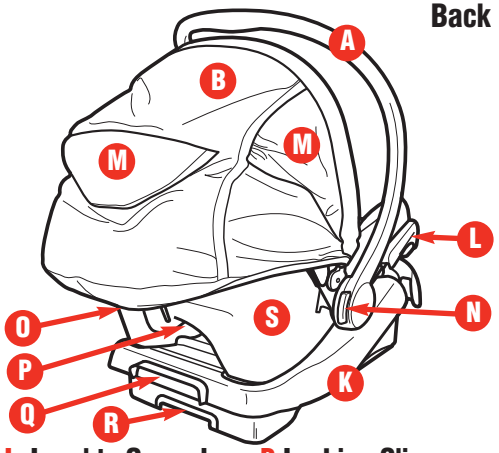

- **L. Level to Ground Line**
- **M. Canopy Window** (on select models)
- **N. Handle Adjustment Button**
- **O. Instruction Manual Storage** (on back of shell)
- **P. Locking Clip** (on back of shell)
- **Q. Base Release Lever**
- **R. Base Adjustment Lever**
- **S. Shell**
- **T. LATCH** (attached to base side)

Removing and Attaching Carrier to the Base



Remove Carrier From Base:

Locate the base release lever on the back of the base.



Squeeze the base release lever and **pull the lever out while rotating the carrier forward.**





Lift carrier off the base.



Install Carrier to Base:

Make sure the base release handle is pulled all the way out.

The label will state "The carrier can now be attached to the base" in green text.



With child secured in child restraint, attach to base. Align the 2 bars on the shell with the hooks in bottom of base. Push down firmly to lock into place. You will hear a "click" when it is locked. Pull up to make sure it is locked into place.

4358-4273E US Mico 11/17/09 11:10 AM Page 19

Canopy Installation and Use



The canopy hoop has an angle that will make the canopy lean forward when installed. Make sure when you thread the canopy hoop, the angle is correct.



Thread plastic strip completely through channel in front of the canopy.



To attach canopy, fit back of canopy over back of shell. Snap each plastic strip end to each canopy post.

Accessories (on select models)



Infant Insert: When using insert, make sure insert does not cover your infant's face in any way. Remove the insert for older babies.

To remove insert: Unthread the harness from the splitter plate (see "Preparing Child Restraint to Fit Your Child" section), remove insert, and rethread harness. Reverse to replace insert.



Harness Covers: Harness covers help provide comfort to the neck. For harness covers to fit correctly, you may have to fit the upper ends of the covers through the harness slots. To remove, unthread harness from splitter plate (see "Preparing Child Restraint to Fit Your Child" section). Slide covers off and reattach harness.

4358-4273E US Mico 11/17/09 11:10 AM Page 21

Choosing Restraint and Position

Rear-Facing
5-22 lbs (2.3-10 kg) AND 19″-29″ tall (48-74 cm).

NOTE: If your child does not meet the criteria for the Rear-Facing position, do not use this child restraint!



Rear-Facing with base: Child and child restraint with base face the back of the vehicle and are placed in the back seat.



Rear-Facing without base: Child and child restraint without base face the back of the vehicle and are placed in the back seat.

Preparing Child Restraint to Fit Your Child

You MUST make these adjustments with your child before you install the child restraint in the vehicle.



Loosen harness by pushing down on the harness release lever (under flap on the front of child restraint) while pulling out on the harness.



Press on harness retainer release button and pull apart.

 continued on next page.



Press red button on buckle to release the buckle plates. Pull buckle plates out. Place harness straps over sides of child restraint.

Place the child's bottom and back flat against the child restraint. This will increase comfort and allow the harness to properly tighten.



Check Harness Height: Determine which set of harness slots works best for your child. Adjust if needed.



Harness slot being used must be **even with or just below** the shoulders.

If the bottom harness slots are above the child's shoulders, **do not** use this child restraint until the child grows into it.



Locate splitter plate on the bottom of shell.



Unfasten harness straps from splitter plate.

 continued on next page.

4358-4273E US Mico 11/17/09 11:10 AM Page 25

9



Pull harness through the harness slots from the front.

Rethread harness into new harness guide location.

10



Refasten harness to splitter plate. **Make sure harness is completely on splitter plate and it does not twist.**

11



Make sure harness straps and harness adjustment strap are between the metal bars and plastic shell.

12



To change buckle location: Determine which of the two available buckle slots is both comfortable and snug for your child.

13



From under seat shell, insert buckle's metal clip up through the shell and pad.

14



Choose new location and pull metal clip through pad and shell.

continued on next page.

4358-4273E US Mico 11/17/09 11:10 AM Page 27



From other side, pull on buckle to check to make sure buckle's metal plate is completely inserted through the pad and shell.

⚠ WARNING

Failure to reinstall the harness system correctly can result in serious injury or death.

Securing Your Child in the Child Restraint



Position harness straps over the child's shoulders.



Push each buckle plate into buckle until you hear a "click". Remember to always pull up on harness straps to make sure buckle is locked tightly.



Snap the harness retainer together.



Pull on harness adjustment strap to tighten harness snugly.

NOTE: A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.



Position the harness retainer at mid-chest (even with armpits), away from the child's neck.

⚠ WARNING:

Failure to fasten and tighten the harness system correctly with each use can result in serious injury or death.



Attach Harness Adjustment Strap End to Shell:

Pull up the pad at the front of the shell.

The end of the harness adjustment strap has a loop. Slide one side of the loop onto one tab and the other end on the other tab. Replace the pad over the front of the shell.

4358-4273E US Mico 11/17/09 11:10 AM Page 31

Removing Your Child from the Child Restraint



Loosen harness by pushing down on the harness release lever (under flap on the front of child restraint) while pulling out on the harness.



Press on harness retainer release button and pull apart.



Release harness by pressing red button on buckle. Remove child.

Carrier Use

To adjust handle, squeeze both adjustment levers on each side of handle. Rotate up or down to desired location. Release levers. Make sure both sides are locked into place.

⚠ WARNING:

Do not use in the seating area or across top of shopping cart.

 continued on next page.

4358-4273E US Mico 11/17/09 11:10 AM Page 33

⚠ WARNING

Read ALL instructions before using child restraint as a carrier.

NEVER use carrier unless child is properly secured.

For use as a carrier by children weighing less than 22 pounds (10 kg) and less than 29 inches (74 cm) tall.

NEVER leave child unattended. Always keep child within arm's reach.

Suffocation Hazard: Infant carrier can roll over on soft surfaces and suffocate child. **NEVER** place carrier on beds, sofas or other soft surfaces.

Strangulation Hazard: Child can strangle in loose harness straps. **NEVER** leave child in carrier when harness straps are loose or undone.

Fall Hazard: Child's movement can slide carrier. **NEVER** place carrier near edges of counter tops, tables or other elevated surfaces.

Do not use the carrier if it is damaged or broken, or if any parts are missing.

Choosing LATCH or Vehicle Belts

The LATCH System

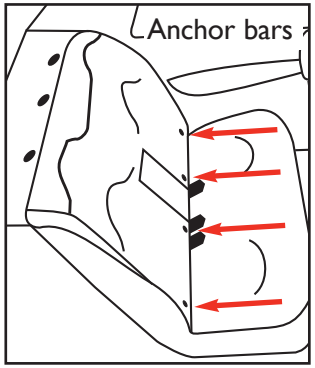

LATCH means **L**ower **A**nchors and **T**ethers for **CH**ildren. Not all vehicles manufactured before September 2002 were equipped with LATCH.

The LATCH system allows a child restraint to be secured in the vehicle without using the vehicle belt system and can ONLY be used in vehicles that have the anchor bars installed.

Check your vehicle owner's manual to see which seating positions may be equipped with the LATCH system.

4358-4273E US Mico 11/17/09 11:10 AM Page 35

Vehicle Belts



If LATCH is not available, you will use your vehicle's belts. There are some vehicle belts that will not work with a child restraint or will require special attention. See next page for specific instructions.

Knowing Your Vehicle Belts

Not all vehicle belts will work with this child restraint. You must determine if your vehicles belts are compatible with this child restraint. If you will use the LATCH system, refer to the LATCH section.

ELR - Emergency Locking Retractor Belts

Definition: These belts only lock in a sudden stop or crash. To see if you have this type of belt, pull on the lap belt, let it return part way, then pull on it again. If it moves freely, it is an ELR belt and the child restraint could work loose during normal driving. Refer to your vehicle owner's manual.

Some ELR belts will convert to Automatic Locking Retractor (ALR) belts if you pull the belt all the way out. Refer to your vehicle owner's manual.

ELR shoulder belts either require a locking clip or cannot be used with any child restraint.

ELR lap-only belts must be replaced with a manual belt; contact your vehicle dealer. A locking clip will not correct this problem.

Automatic/Passive vehicle seat belts

The automatic (passive) 2-point belt has no lap belt. You must install a lap belt to secure a child restraint. You may also need to install an extra lap

 continued on next page.

belt for an automatic 3-point belt. Refer to the vehicles owner's manual. A locking clip will not correct this problem.

Vehicle belt too short
Contact your vehicle dealer for a seat belt extender.

Belts in center of the door or side panel (A) or middle of the vehicle seat cushion (B).



You must move the child restraint to another seating location. A locking clip will not fix this problem.

See "Locking Clip" section.



Manual Belts

Manual lap belts are common in the center rear seat and can allow the child restraint to loosen when it is tilted or jarred. After tightening the lap belt securely, tilt and push the child restraint forward and to both sides. If no loosening occurs, your child restraint should be secure.

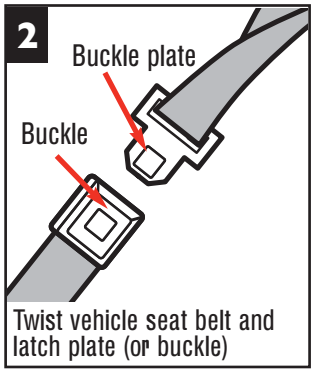

If loosening does occur, try the following: If the buckle plate slides on the belt, turn the buckle plate over. If the buckle slides, turn the buckle. Refasten the vehicle lap belt. The release button should face **out** after twisting so that it is easy to reach in an emergency.

If the lap belt continues to loosen, the child restraint must be moved to another location in the vehicle. A locking clip will not correct this problem; see your vehicle owner's manual.

⚠ WARNING

Failure to check and adjust the manual lap belt as described above can result in serious injury or death.

Locking Clip

NOTE: Remove the locking clip when the seat belt is not being used with a child restraint. The locking clip is located on the back of the seat. A locking clip will not fix all types of seat belt problems.

Before you put your child restraint in the vehicle, buckle the lap/shoulder belt. Pull on the lap belt portion. If it loosens or slips, you must either use a locking clip to hold the seat belt tight or move the child restraint to another seating location.

1



Thread both vehicle lap and shoulder belts through the belt path (as shown). Buckle. Pull up on shoulder belt until all slack is out and lap belt is tight.

Grasp both vehicle belts together just behind the buckle plate and unbuckle.

2



Thread both portions of the vehicle belt onto the locking clip.

3



Position locking clip about 1 in. (2.5 cm) from vehicle belt's buckle plate.

4



Rebuckle belt. Lap belt portion should now be tight. If not, remove locking clip and repeat all steps.

5



Same steps apply for use on the child restraint. Review the "Rear-Facing Installation with Vehicle Belt - Without Base" section for correct belt routing.

4358-4273E US Mico 11/17/09 11:10 AM Page 41

Rear-Facing Use

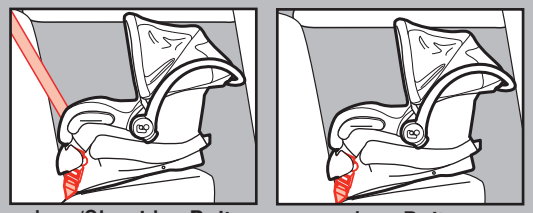

Lap/Shoulder Belt | Lap Belt

LATCH Belt | Lap/Shoulder Belt

⚠ WARNING:

Failure to place this child restraint facing the rear of the vehicle when the child is between 5-22 lbs (2.3-10 kg) can result in serious injury or death.

Placing a rear-facing child restraint in any seat equipped with an air bag can result in serious injury or death.

Rear-Facing Installation with Vehicle Belt - Using the Base:

1



When LATCH is not being used, fasten LATCH connectors on the sides of the base as shown.

⚠ WARNING:

A loose LATCH system can result in serious injury or death.

2

Place base in the back seat with taller side against the back of vehicle seat.



Thread the vehicle lap or lap/shoulder belt combination through belt path as shown. Buckle vehicle belt.

Push down firmly on the base and pull up on the belt to tighten. For a manual belt, refer to "Knowing Your Vehicle Belts" section. Pull up on shoulder strap to remove any slack.



With weakest hand at belt path, tilt and push the base forward and back, and from side to side. If the seat belts do not loosen, your child restraint should be secure.

NOTE: Some "play" from front to back or about an inch from side to side is acceptable. If it moves more, review "Knowing Your Vehicle Belts" and "The Locking Clip" sections.

⚠ WARNING

Using this child restraint in any vehicle seat where the lap belt cannot be tightened securely and properly or where it can be loosened by pulling on it can result in serious injury or death.



Install Carrier to Base:

Make sure the base release handle is pulled all the way out. The label will state "The carrier can now be attached to the base" in green text.



With child secured in child restraint, attach to base. Align the 2 bars on the shell with the hooks in bottom of base. Push down firmly to lock into place. You will hear a "click" when it is locked. Pull up to make sure it is locked into place.

 continued on next page.

4358-4273E US Mico 11/17/09 11:10 AM Page 45

8



Make sure level line on side of shell is level to ground. Adjust base if needed.

9



To Adjust Base:
Pull the base adjustment lever and either lift or lower front of base.

⚠ WARNING

Failure to securely attach child restraint to base can result in serious injury or death.

10

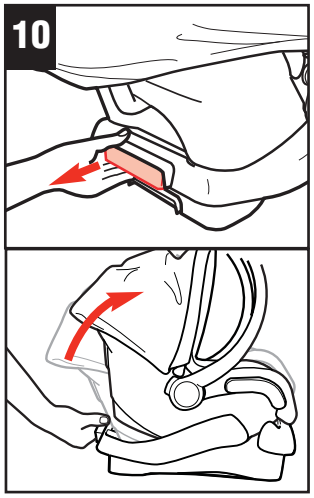

Squeeze the base release lever and **pull the lever out while rotating the carrier forward.** Release the base lever.

11



Lift carrier off the base.

4358-4273E US Mico 11/17/09 11:10 AM Page 47

Rear-Facing Installation with Vehicle Belt - Without Base:

1



With child secured in child restraint, place rear-facing in the back seat. Make sure level line on side of shell is level to ground. Adjust child restraint if needed.

2



Thread the vehicle lap or lap/ shoulder belt combination through shell's belt path as shown. Buckle vehicle belt.

3



Lay your forearm across child restraint at the belt path while pulling up on belt to tighten. For a manual belt, refer to "Knowing Your Vehicle Belts" section. Pull on shoulder strap to remove any slack.

4

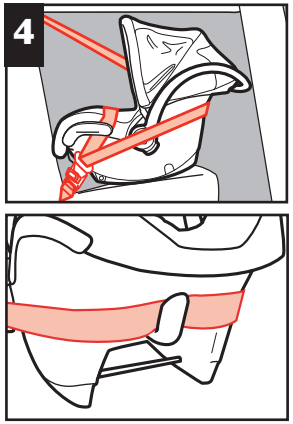

If your shoulder belt is long enough, you may secure it behind the seat shell by threading through both slots on back of shell.

 continued on next page.

4358-4273E US Mico 11/17/09 11:10 AM Page 49

5



If shoulder belt is not long enough, route shoulder belt over child restraint as shown.

6



With weakest hand at belt path, tilt and push the child restraint forward and back, and from side to side. If the seat belts do not loosen, your child restraint should be secure.

NOTE: Some "play" from front to back or about an inch from side to side is acceptable. If it moves more, review "Knowing Your Vehicle Belts" and "The Locking Clip" sections.

⚠ WARNING

Using this child restraint in any vehicle seat where the lap belt cannot be tightened securely and properly or where it can be loosened by pulling on it can result in serious injury or death.

Rear-Facing Installation with LATCH and Base

NOTE: Do not use the LATCH system when using the vehicle lap or lap/shoulder belt.

LATCH is only equipped on the base. If desired, a LATCH kit or an additional base can be purchased for use on this child restraint. See replacement parts list.

1



To use LATCH, unhook LATCH connectors from base by pressing the red release button on each connector.

2



Thread the LATCH belt through belt path as shown.

NOTE: Adjuster **MUST** be on the **left side** of child restraint as shown. **DO NOT twist belt.**

 continued on next page.

3



Place base in the back seat with taller side against the back of vehicle seat.

4



Fasten one LATCH belt connector to the anchor in the vehicle seat located in the vehicle seat bight. Repeat for other side of child restraint. See your vehicle owner's manual for more information.

5



NOTE: Make sure arrows on connectors are facing up.

6



Push down firmly on the base and pull up on the loop to tighten belt.

7



With weakest hand at belt path, tilt and push the base forward and back, and from side to side. If the LATCH belts do not loosen, your child restraint should be secure.

NOTE: Some "play" from front to back or about an inch from side to side is acceptable.

If the child restraint does not remain tight, do not use the child restraint in this seating location with this LATCH system.

⚠ WARNING

LATCH connectors MUST be securely fastened. Failure to do this can result in serious injury or death.

8



Install Carrier to Base:

Make sure the base release handle is pulled all the way out. The label will state "The carrier can now be attached to the base" in green text.

50 *continued on next page.*

9



With child secured in child restraint, attach to base. Align the 2 bars on the shell with the hooks in bottom of base. Push down firmly to lock into place. You will hear a "click" when it is locked. Pull up to make sure it is locked into place.

⚠ WARNING

Failure to securely attach child restraint to base can result in serious injury or death.

10



Make sure level line on side of shell is level to ground. Adjust base if needed.

11



To Adjust Base:

Pull the base adjustment lever and either lift or lower front of base.

If you have a non-adjustable base, refer to the "Troubleshooting" section.

12

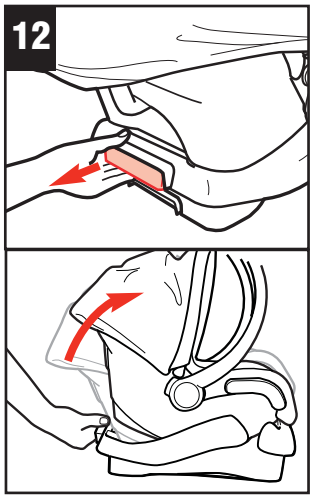

Squeeze the base release lever and **pull the lever out while rotating the carrier forward.** Release the base lever.



Lift carrier off the base.



To Release LATCH:
Remove LATCH from vehicle anchors by pressing the red release button on each connector.

Removing Seat Pad for Cleaning

⚠ WARNING

Do not use this child restraint without the seat pad. Failure to do this can result in serious injury.



Loosen harness by pushing down on the harness release lever (under flap on the front of child restraint) while pulling out on the harness.



Unfasten harness straps from splitter plate.

54 *continued on next page.*

3

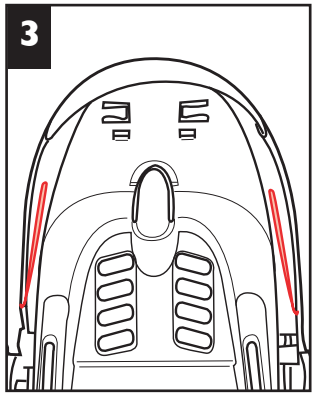

Depending on your model, from the back, undo the elastic straps on sides of shell or unbutton the pad from the side of the shell.



4



From the front, pull harness straps out of the shell and pad.

5



Unthread harness from the harness retainer.

Unthread harness from the buckle plate.

6



Pull bottom of pad off the shell. Pull the buckle through pad.

7



From the top, pull the pad off the shell.

Pad: Hand wash with warm sudsy water, rinse clean, and air dry. Do not use bleach or other harsh cleaners. Do not dry clean.

Harness Straps: Spot clean only. Do not machine wash.

 continued on next page.

4358-4273E US Mico 11/17/09 11:10 AM Page 59

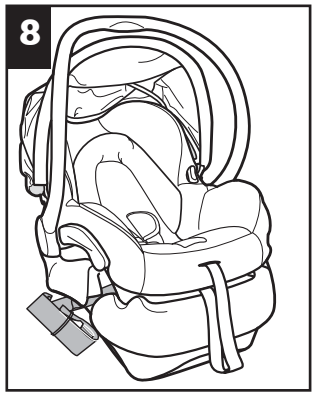

Replace seat pad by reversing order. Pulling buckle through pad, wrap pad around bottom of shell and top of shell. Reattach elastic to sides of shell or button the top of the pad to top of shell. Relace harness in reverse order; relace harness and attach to the splitter plate.

Troubleshooting

✔1. If your child restraint is not held securely by the belt:
Press down firmly on the child restraint and remove all the slack in the belt. Make sure the belt buckle is not up against the child restraint where the belt cannot be tightened. Review Locking Clip section. If you cannot secure the child restraint tightly, move it to another seating location.

✔2. If the child restraint buckle sticks or you cannot get the straps tight enough around child:
DO NOT LUBRICATE. Check around buckle for dropped food, sticky spilled drinks, dirt, leaves, etc. Clean with warm water and/or remove object with tweezers. If you cannot get the harness to adjust and remain tight with the buckle securely locked, do not use the child restraint.

✔3. If your harness twists or ropes:
Straighten the harness each time you put your child in the child restraint to help prevent twisting. Lock the buckle and tighten harness and it will be ready for next use.



✔4. If your infant sits too upright in the rear-facing position:
If your vehicle seat slopes so much that your infant is sitting upright, you may place a rolled towel under the front of the child restraint so that the level line on the side of shell is level (horizontal) to ground. Check often to be sure padding is still in place and the vehicle belt is tight.

⚠ WARNING

Using padding that tilts the child restraint farther back than the level-to-ground line can result in serious injury or death.

Warranty

Dorel Juvenile Group, Inc. (DJG) warrants this product to the original retail purchaser as follows:
This product is warranted against defective materials or workmanship for one year from the date of original purchase. **An original receipt is required to validate your warranty.** DJG will, at its option, provide replacement parts or replace this product. DJG reserves the right to substitute if the part or model has been discontinued.

To make a claim under this warranty you may contact us at www.djgusa.com, fax us at 1-800-207-8182 twenty-four hours a day, write to DJG, Consumer Relations Department, P O Box 2609, Columbus, IN 47202-2609, or call 1-800-544-1108 from 7:00 a.m. to 6:00 p.m. EST Monday through Thursday and from 7:00 a.m. to 4:30 p.m. on Friday. **Proof of purchase is required and shipping charges are the responsibility of the consumer.**

Warranty Limitations:

This warranty does not include damages which arise from misuse or abuse of this product.

Limitation of Damages:

The warranty and remedies as set forth are exclusive and in lieu of all others, oral or written, expressed or implied. In no event will DJG or the dealer selling this product be liable to you for any damages, including incidental or consequential damages, arising out of the use or inability to use this product.

 continued on next page.

4358-4273E US Mico 11/17/09 11:10 AM Page 63

Limitation of warranties and other warranty terms and state law rights:

Any implied warranties, including implied warranties of the merchantability and fitness for a particular purpose, shall be limited to the duration and terms of the express written warranty. Some states do not allow limitations as to how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights, and you may have other rights, which vary from state to state. Neither DJG nor the dealer selling this product authorized any person to create for it any other warranty, obligation, or liability in connection with this product.

PLEASE COMPLETE AND MAIL THE PRE-ADDRESSED OWNER REGISTRATION CARD WITHIN (30) DAYS OF PURCHASE TO EXPEDITE WARRANTY CLAIMS AND TO VERIFY THE ORIGINAL DATE OF PURCHASE.

4358-4273E US Mico 11/17/09 11:10 AM Page 65

4358-4273E US Mico 11/17/09 11:10 AM Page 67

Replacement Parts Order Form

Complete the form below. Your model number with color code and manufacturer date code MUST be included on the form to ensure proper replacement parts. Your model number with color code and the date code can be found on a sticker on the side of child restraint. Payment in U.S. dollars must accompany your order. Choose parts needed from the list on the back page.

Return the form with payment to:

Dorel Juvenile Group, Inc.
Consumer Relations Department
P.O. Box 2609
Columbus, IN 47202-2609

Fax orders to: 1-800-207-8182

Please make money orders payable to Dorel Juvenile Group, Inc. Fill in the area below to charge to Visa or Mastercard. We do not accept personal checks or Discover Card. All outside of U.S. and Canada MUST use credit card.

Ship To (Please Print): _____

Name: _____

Address: _____

City: _____

State/Province: _____ Zip _____

Telephone: _____

Email Address: _____

We MUST have this information to process your order:
Model Number (5 digits & 3 letters): _____
Manufacture Date (mm/dd/yyyy): _____